

SPRO


POE INJECTOR

100m Transmission Distance



Key Features

- Support 1*10/100/1000M PoE port + 1*10/100/1000M network port
- Comply with IEEE802.3, IEEE802.3u, IEEE802.3ab standards
- Ethernet port supports 10/100/1000M self-adaptation
- Support IEEE802.3af (15.4W), IEEE802.3at (30w)
- Support AC 100-240 V input
- -10 to 50°C operating temperature

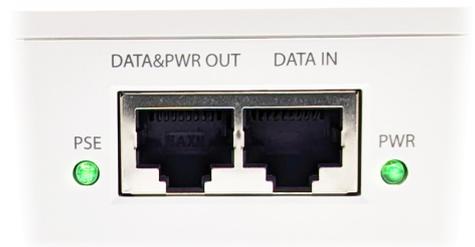

Input/Output Interface

Ethernet	1*PoE port
	1*RJ45 network port

Protocol Standard

Network Protocol	IEEE802.3 (Ethernet)
	IEEE802.3u (Fast Ethernet)
	IEEE802.3ab (Gigabit Ethernet)
Network Medium	10Base-T : Cat5 or above UTP/STP (≤100m)
	100Base-TX : Cat5 or above UTP/STP (≤100m)
	1000BASE-TX: Category Cat5 and above UTP (≤100 meters)

General

Working Temperature	-10~55°C
Indicator Light	PWR (Power Indicator); PSE (Power Sourcing Equipment)
Dimensions	132.3mm x 60mm x 33mm
Packing List	1 power cord, 1 manual, 1 certificate